

Dust Removal System

ECOstream


High dust amounts, visible particles
Especially suitable for tissue, textile, non-woven

- Contact cleaner, web applications
- High velocity vacuum air flow with ionising system
- Up to 1500m/min. web speeds
- 50mm – 10 Metres working width, single or dual side
- Positioned in free web space, wear free
- Fully automated with PLC control and customer



Textile
Tissue
Non-Woven Textile
Tissue

Removal rate (%)

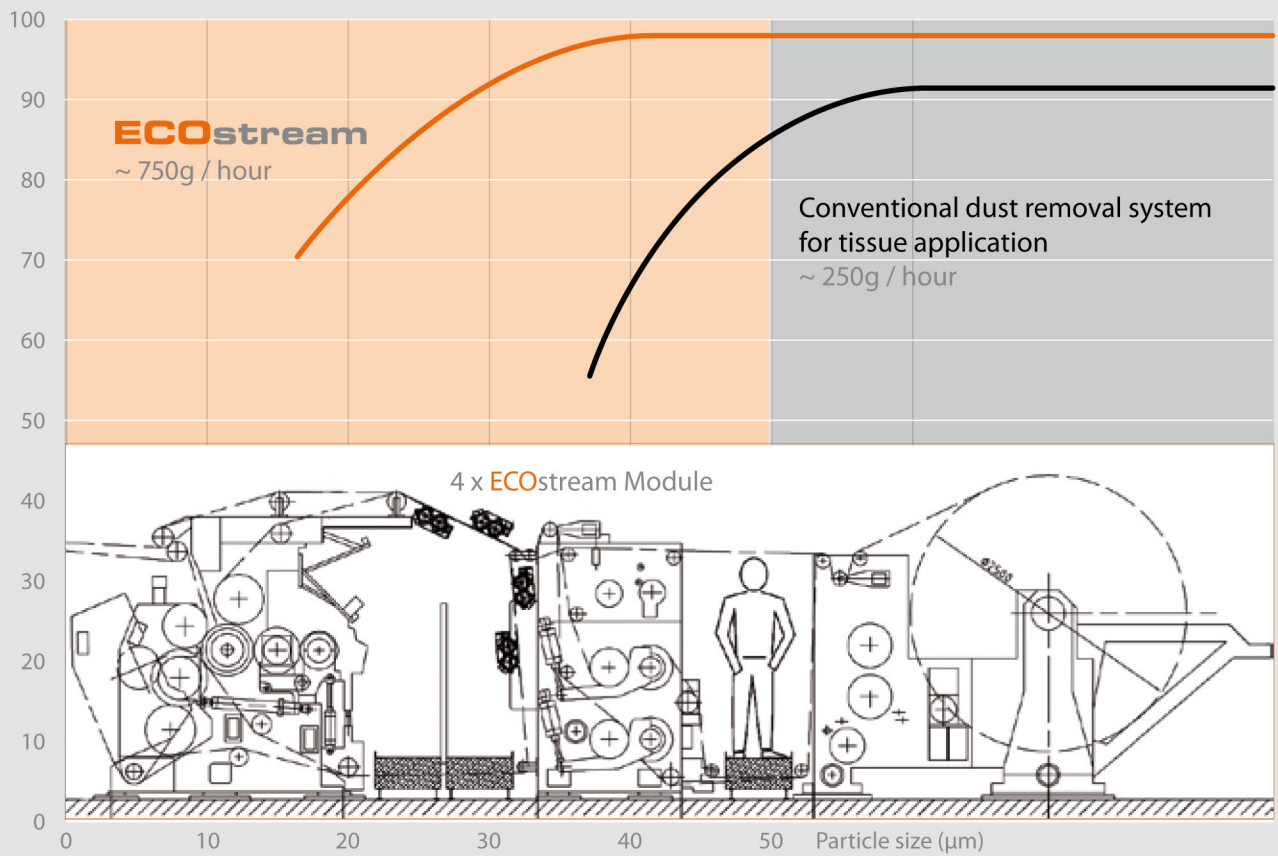

System cleaning efficiency comparison